

2.2.4 Haki

2.2.4.1 2 rygle hakowe (2CH)




1500 – 1900		45	92	8	1020	–	400	V02/05	H600	Roto Sil	5 szt.	629896
1900 – 2200		35	92	8	1020	–	300	V02/03	H600	Roto Sil	5 szt.	611341
		45	92	8	1020	–	300	V02/03	H600	Roto Sil	5 szt.	636077



INFO

Rysunek z dokładnymi wymiarami zamka wielopunktowego należy wybrać na podstawie układu ryglowań. → *od strony 240.*

2.2.4.2 4 rygle hakowe (4CH)




1900 – 2200		45	92	8	1020	–	300	V08/17	H600	Roto Sil	5 szt.	637521



INFO

Rysunek z dokładnymi wymiarami zamka wielopunktowego należy wybrać na podstawie układu ryglowań. → *od strony 240.*

9.1.4 V02/03

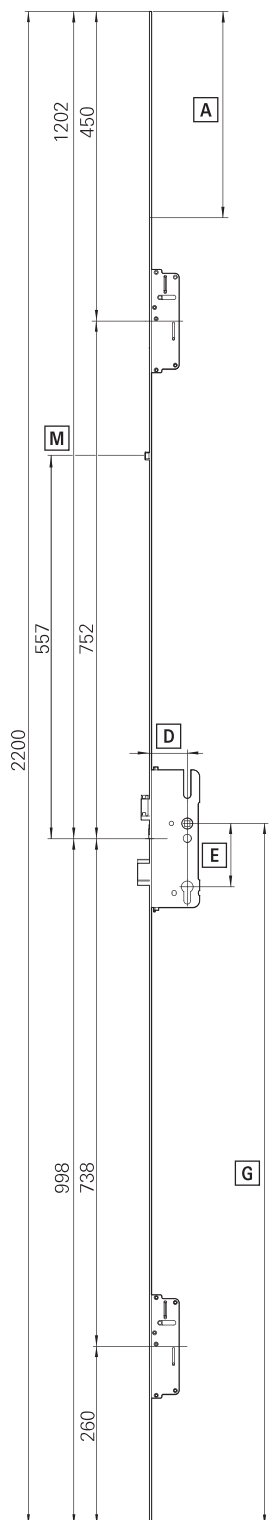

Odnosnik	Symbol	Znaczenie
[A]		Zakres skracania
[D]		Dornmas
[E]		Rozstaw
[G]		Wys. osadzenia klamki
[M]	-	MVS (opcjonalnie)



INFO

Dokładne wymiary patrz opis artykułu.